
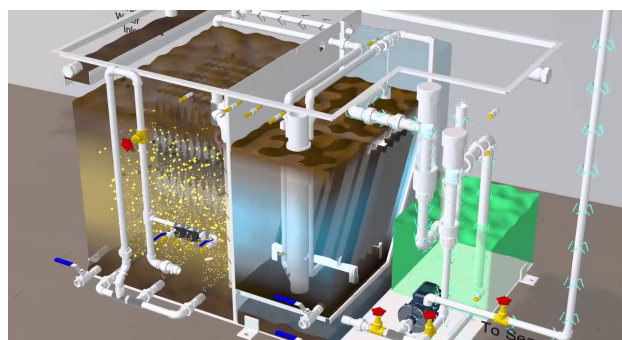
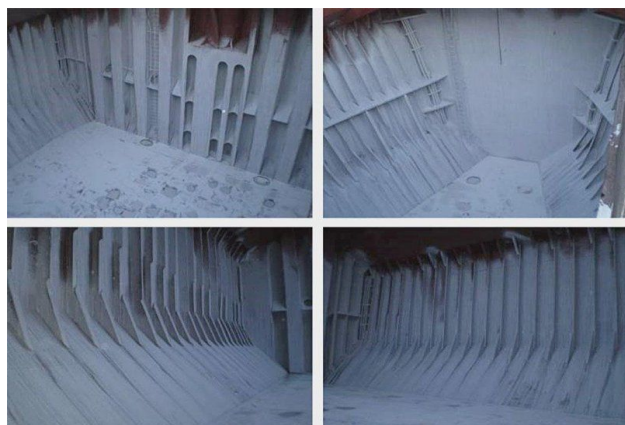


# DATA SHEET

## T51 TrimarCal -Slaked Lime



Product Properties		Packing	
Colour	White	25 kg sack	PN: T51-25
pH	12.1-12.5		
Type	powder		
Flash point	N/A		

IN-DS-T51r0 251219



**TRIMAR  
EUROLUBE**

Trimar Eurolube (Thailand) Co., Ltd.  
108/10 Moo 6 Najomtien  
Sattahip 20250 Chonburi Thailand  
[www.eurolube.net](http://www.eurolube.net) [sales@eurolube.net](mailto:sales@eurolube.net)

One - Stop - Shop for oilfield supplies  
Chemicals - Oils & Lubricants -  
Safety & PPE - General Supplies

### What ?

Calcium Hydroxide power CAOH.

### When and where?

Use as cargo ship hold lime washing to protect the hold from aggressive and corrosive cargo such as sulphur, salts.

Use as flocculant in waste water to aid clearing and filtering



### How?

#### For hold lime wash:

Mix 40 kg T51 with 200l hot or warm water to produce an adequate wash. Option to add 2.5 kg granulated sugar to simplify post cargo wash removal.

Apply mix with brushes or painting equipment.

Post cargo removal: Clean off with HP seawater, once lime wash is removed hose down hold with freshwater.

If water washing is not sufficient to remove wash use Trimar T37 acid hold cleaner to remove wash then repeat water cleaning.

#### Waste water treatment:

Add powder to waste water or turbid water to allow suspended particle to floc and sink to bottom/ or be filtered out. Use mixing instructions as per sewage treatment plant/ water plant or draw sample in bucket to test best mixing ratio if unsure.

### Why?

- Protect hold from aggressive cargoes
- Use in holds with damaged paint work as temporary protection
- Effective water and sewage treatment